

IMPLEMENTATION OF THE DESIGNED PROGRAM FOR CALCULATION AND CHECK OF CHAIN GEARS

JOZEF MASCENIK

Department of Design and Monitoring of Technical Systems,
Faculty of Manufacturing Technologies with a seat in
Presov, Technical University of Kosice, Presov
Slovak republic

DOI : 10.17973/MMSJ.2019_12_2019008

jozef.mascenik@tuke.sk

The presented paper deals with the design proposal and application of program for calculation and check of chain gears. The computing program has been created as a spreadsheet in the working environment of the Microsoft Office program by the Excel application through defined sequences of the individual commands. The program serves for design proposal of a chain drive by means of inserted databases, graphs and tables. In the process of designing and checking the input values are entered such as performance, rotations, and number of wheels. Through calculation the software generates speed of a chain, circumferential speed, tensile force, number of chain links, axial distance, etc. At the same time the paper compares generated parameters with manual calculation of the chain gear.

KEYWORDS

program, chain gears, calculation, design, strength

1 INTRODUCTION

Transmission of kinematic and force effects of the driving engine upon working machine is provided by the drive. The overall structure of the drive does not represent the simplest part; the entire drive consists of several segments. The segments are jointly exposed to stress and therefore the segments are overloaded and damaged. Or some of its segments get worn. All of the aforementioned reasons lead to correct specification of drive structure and to designing of its individual segments to assure reliable operation which would be safe and economical. The chain drive also consists of several segments which must work together in perfect harmony [Murcinkova 2013]. In case of incorrect coherence of the segments the gear would be ineffective and eventually unusable. In practice the chain drive is exposed to effects of environment which influences the chain. Appropriate care and maintenance of the chain gear as well as adequate servicing can prolong its service life. Even though current market offers diverse programs which can design chain gears and carry out strength analysis still there exists platform for improvement and creation of such programs [Gaspar 2017].

2 CHAIN GEARS

Chain gears are as machine parts which are used for transmission of low and average performance with circumferential speed of up to 30 or 45 m.s⁻¹ in case of which the gear ratio reaches values of $i =$ from 2 up to 8, from a driving shaft to a shaft or to several shafts serving for transmission of torque M_k . One of the simplest chain gears is a gear which consists of a chain and of two chain wheels [Smeringaiova 2016]. Generally valid regularities of gears are applicable in case of chain gears therefore gear ratio is as follows:

$$i = \frac{\omega_1}{\omega_2} = \frac{n_1}{n_2} = \frac{z_2}{z_1}, \quad \text{or} \quad i = \eta * \frac{M_2}{M_1} \quad (1)$$

Alike the belt gear the chain gears are based on transmission of tensile force. They perform rotary motions between two or among several shafts. The chains are mostly made of premium steel which and therefore their strength and compactness is higher contrary to belts [Pavlenko 2017b].

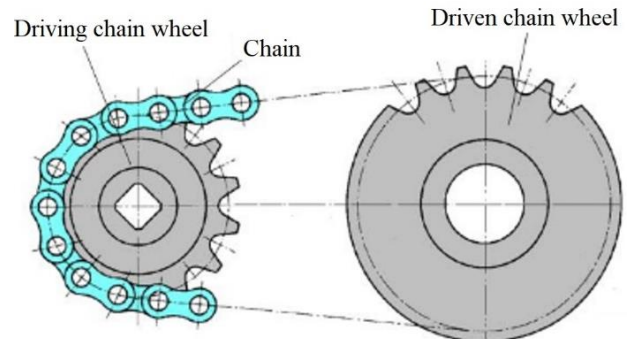


Figure 1. Chain gear and its main parts

Chain gear can transmit large tensile force for long distance; it is also synchronous with invariable gear ratio, i.e. without slip. The gears are immune to negative influences of environment and therefore they are used, for example, in case of shaping machines, conveyor belts, bicycles and motorcycles, construction machines and automobiles [Mascenik 2014].

3 ANALYTICAL CALCULATION OF CHAIN GEAR

To assure correct results of the designed program the program out was compared with the results of analytical calculation. To provide comparison the following mathematical model of design proposal and check of chain gear was proposed: Input performance $P = 8.5\text{kW}$, input rotations $n_1 = 2.316\text{ s}^{-1}$.

3.1 Design Proposal of Chain Gear

Calculation of diagram performance:

$$P_D = \frac{P}{\kappa * \mu * \varphi} = \frac{8.5}{0.82 * 1 * 0.6} = 17.66\text{kW} \quad (2)$$

To determine the suitable chain, the diagram performance P_D and rotations of output shafts are followed. Trough calculation by means of graph (Fig.2) intended for determination of the chain drive selected is the triple-line chain 16B-3 STN 023311 standard and selected are also $z_1=15$ and $z_2=30$ [Pavlenko 2015].

Calculation of Pitch Diameters:

$$D_{t1} = \frac{t}{\sin \frac{180^\circ}{z_1}} = \frac{25.4}{\sin \frac{180^\circ}{15}} = 122.167\text{mm} \quad (3)$$

$$D_{t2} = \frac{t}{\sin \frac{180^\circ}{z_2}} = \frac{25.4}{\sin \frac{180^\circ}{30}} = 243.06\text{mm} \quad (4)$$

With t – chain pitch, z_1 – number of teeth of input wheel.

Type of chain 16B was selected on the basis of the calculated value of diagram performance and input rotations by means of the following diagram (Fig.2).

of the table values for decisive pressure and coefficient of friction.

2. STRENGTH CHECK OF A CHAIN			
Speed of a chain			
v	#####	[m*s ⁻¹]	
Circumferential speed of a chain wheel			
F_o	#####	[N]	
Circumferential force			
F_{oc}	#####	[N]	
Entire tensile force of a chain			
F_t	#####	[N]	
Calculation pressure in the joint of a chain			
P_p	#####	[MPa]	
Permitted pressure in the joint of a chain			
Decisive pressure (p)			
Coefficient of friction (λ)			
P_D	0	[MPa]	#####
Safety coefficient against rupture in case of static load			
k_s	#####		#####
Safety coefficient against rupture in case of dynamic load			
k_d	#####		#####

Figure 4. Strength check of the chain

For correct check of the chain it is inevitable to detect if the chain is suitable. The program also works with the comparison of the values which are consequently assessed. In case of unsuitable values, it immediately detects and assesses the value as being the suitable or unsuitable [Bicejova 2013].

The program compares calculation pressure with the permitted one. The permitted pressure should be higher than the calculation one [Majernik 2018].

Calculation pressure in the joint of a chain			
P_p	15.470	[MPa]	
Permitted pressure in the joint of a chain			
Decisive pressure (p)	26.6		
Coefficient of friction (λ)	0.6		
P_D	15.96	[MPa]	Satisfactory

Figure 5. Suitable pressure

In case of unsuitable pressure, the program colours the cell red and assesses the pressure as the unsuitable one.

Calculation pressure in the joint of a chain			
P_p	15.470	[MPa]	
Permitted pressure in the joint of a chain			
Decisive pressure (p)	26.6		
Coefficient of friction (λ)	0.3		
P_D	7.98	[MPa]	Unsatisfactory

Figure 6. Unsuitable pressure

4.4 Supporting Tables of the Program

Since the chain program calculation requires several values being determined on the basis of the tables the program itself contains the parts in which the values can be sought for. The tables allow faster and easier calculation as should that be not the case the dictionary of engineering terms must be used.

To facilitate the work, the following data and values were entered into the program [Pavlenko 2017a]:

- Coefficients of shock – in the program “selectable” in case of the offered option which can be opened and out of which the needed value can be selected. To determine the coefficient of shock correctly the program contains the table with descriptions referring to type of shock. Thus correct determination of its value is possible [Balazikova 2016]

- Coefficients of performance – other table of values refers to coefficient of performance which is selected according to

number of teeth of the small chain wheel, gear ratio and coefficient of shocks [Mascenik 2016b].

- Coefficients of greasing – alike the coefficient of shock the coefficient of greasing can be selected out of the given values. To select correct value of the coefficient of greasing the program also contains the table with descriptions referring to its correct determination [Gaspar 2013].

- Decisive pressure of the joint – it refers to a table value which is selected according to operation time of the chain, coefficient of shock, coefficient of greasing, coefficient of axial distance and gear ratio. When the values have been detected, the decisive pressure can be read off the attached table of the program.

- Coefficients of friction – have been included into the table part of the program. To determine the value of coefficient of friction correctly, it is inevitable to determine coefficient of shock correctly, gear ratio, chain according to the standard, etc.

5 CALCULATION EXAMPLE BY MEANS OF THE DESIGNED PROGRAM

1. DESIGN PROPOSAL OF THE CHAIN GEAR			
Performance (P)	8.5	[kW]	
Rotations of a small chain wheel (n_1)	2.316	[s ⁻¹]	
Coefficient of performance (κ)	0.82		
Coefficient of greasing (μ)	1		
Coefficient of chain construction (φ)	0.6		
Coefficient of shock (Y)	1		
Calculation of a diagram performance			
P_D	17.22935	[kW]	
Number of teeth of wheels			
Gear ratio (i)	2		
Number of teeth of a small wheel (z_1)	15		
Number of teeth of a big wheel (z_2)	30		
Values according to selected chain			
Pitch of a chain (t)	25.4		
Weight of 1 meter (m')	8		
Area (S)	631		
Force in case of rupture (F_{pt})	181500	[N]	
Calculation of pitch diameters			
D_{t1}	122.167	[mm]	
D_{t2}	242.996	[mm]	

Figure 7. Designed Chain Gear

2. STRENGTH CHECK OF A CHAIN			
Speed of a chain			
v	0.888	[m*s ⁻¹]	
Circumferential speed of a chain wheel			
F_o	9541.375	[N]	
Circumferential force			
F_{oc}	6.314	[N]	
Entire tensile force of a chain			
F_t	9547.690	[N]	
Calculation pressure in the joint of a chain			
P_p	15.131	[MPa]	
Permitted pressure in the joint of a chain			
Decisive pressure (p)	26.6		
Coefficient of friction (λ)	0.6		
P_D	15.96	[MPa]	Satisfactory
Safety coefficient against rupture in case of static load			
k_s	19.010		Satisfactory
Safety coefficient against rupture in case of dynamic load			
k_d	19.010		Satisfactory

Figure 8. Strength check of chain gear 1/2

Number of chain elements		
Axial distance (a)	300	[mm]
X	46.6	elements
Selected number	48	elements
Actual axis distance		
K	0.8	
a	247.65	[mm]

Figure 9. Strength check of chain gear 2/2

6 CONCLUSION

When all inevitable values have been calculated by analytical calculation and by consequent calculation with the designed program the program might be considered as correctly designed since it generates results comparable with the design of chain gear and strength check of the selected chain. Contrary to analytical calculation the program appears to be rather advantageous and in case of inevitable calculations no calculators are needed which prevents incorrect entering of values. To simplify the calculation, the attached tables were used which shortened the period of searching for table values. Ultimately, the program thus facilitates work during calculations and assures their accuracy. Newly designed program can be applied in education process as well as in practice in development and production sphere.

ACKNOWLEDGEMENT

This article has been prepared within the project KEGA 051TUKE-4/2018.

REFERENCES

- [Balazikova 2016] Balážiková, M. Assessment of ergonomic risks of the selected work activity by niosh method. Science. Business. Society, 2016, Vol. 1, No. 5, pp. 42-45. ISSN 2367-8380.
- [Bicejova 2013] Bičejová, L. Abrasive kind and granularity changes affects to water jet technology head vibration during cutting HARDOX material thickness alternation process. Applied Mechanics and Materials, 2013, Vol. 308, pp. 75-79. ISSN 1660-9336.
- [Cacko 2014] Cacko, P., Krenicky, T., Dobransky, J. Impact of an Excessive Wear of Bearing on the Mechatronic Devices. Applied Mechanics and Materials, 2014, Vol. 460, pp. 99-106. ISSN 1660-9336.
- [Fabian 2014] Fabian, S., Bičejová, L. Technological head tilt angle influence analysis to generation of vibration during ceramics material machining by means of AWJ technology.

CONTACTS

M.Sc. Jozef Maščenik, PhD.

Department of Design and Monitoring of Technical Systems, Faculty of Manufacturing Technologies with a seat in Presov, Technical University of Kosice, Presov, Slovak Republic

Bayerova 1, Presov, 080 01, Slovak Republic

+421 51 772 6337, jozef.mascenik@tuke.sk, www.tuke.sk

Applied Mechanics and Materials, 2014, Vol. 616 pp. 175-182. ISSN 1660-9336.

[Gaspar 2017] Gašpár, S., Paško, J., Majerník, J. Influence of structure adjustment of gating system of casting mould upon the quality of die cast. Lüdenscheid, RAM Verlag, 2017, p. 82. ISBN 978-3-942303-47-7.

[Gaspar 2013] Gašpár, S. and Paško, J. Influence of technological factors of die casting on mechanical properties of castings from silumin. Lecture Notes in Electrical Engineering, 2013, Vol. 240, pp. 713-722. ISSN 1876-1100.

[Majernik 2018] Majerník, J., Gašpár, Š., Gryc, K., Socha, L. Changes in Eutectic Silumin Structure Depending on Gate Geometry and Its Effect on Mechanical Properties of Casting. Manufacturing technology, 2018, Vol. 18, No. 3, pp. 439-443. ISSN 1213-2489.

[Mascenik 2014] Maščenik, J., Pavlenko, S. Aspects of alternative dispute creating bolted joint technology flowdrill. Applied Mechanics and Materials, 2014, Vol. 680, pp. 186-189. ISSN 1660-9336.

[Mascenik 2016a] Maščenik, J., Pavlenko, S., Bičejová, L. A device designed to monitor new belt types with application of diagnostic system. MM Science Journal, 2016, Vol. September, pp. 931-934. ISSN 1803-1269.

[Mascenik 2016b] Maščenik, J., Vojtko, I. Experimental monitoring and diagnostics of belt gears in testing device. MM Science Journal, Vol. 2016, No. September, pp. 964-968. ISSN 1803-1269, DOI: 10.17973/MMSJ.2016_09_201641.

[Murcinkova 2013] Murcinkova, Z., Krenicky, T. Applications utilizing the damping of composite microstructures for mechanisms of production machines and manipulator devices. In: SGEM 2013: 13th Int. Multidisciplinary Sci. Geoconf. Vol. 1: 16-22 June, 2013, Albena, Bulgaria. Sofia: STEF92 Technology, 2013, pp. 23-30. ISBN 978-954-91818-9-0.

[Pavlenko 2015] Pavlenko, S., Litecká, J., Maščenik, J., Kačalová, M. Gear Hobs Profiling and Gear Production Using Unconventional Technology, 2015, Brno MSD. 175 p. ISBN 978-80-7392-249-8.

[Pavlenko 2017a] Pavlenko, S. Design and check of the mechanical components by the PC application. MM Science Journal. 2017, No. December, pp. 1914-1918. ISSN 1803-1269.

[Pavlenko 2017b] Pavlenko, S. Design of a program for calculation of forcing spring stiffness. MM Science Journal, 2017, No. December, pp. 1924-1928. ISSN 1803-1269.

[Smeringaiova 2016] Šmeringaiová, A., Vojtko, I., Lešková, B. Suspension system in automobile system. MM Science Journal, 2016, No. September, pp. 1004-1008. ISSN 1803-1269.